Surname		Othe	er Names			
Centre Number Candidate Number						
Candidate Signature		·				

For Exmainer's Use

General Certificate of Education June 2007 Advanced Level Examination

ASSESSMENT and QUALIFICATIONS ALLIANCE

PHA7/W

PHYSICS (SPECIFICATION A) Unit 7 Nuclear Instability: Applied Physics Option

Thursday 14 June 2007 9.00 am to 10.15 am

For this paper you must have:

- a calculator
- a pencil and a ruler.

Time allowed: 1 hour 15 minutes

Instructions

- Use blue or black ink or ball-point pen.
- Fill in the boxes at the top of this page.
- Answer all questions.
- Answer the questions in the spaces provided.
- Show all your working.
- Do all rough work in this book. Cross through any work you do not want to be marked.

Information

- The maximum mark for this paper is 40.
- Two of these marks will be awarded for using good English, organising information clearly and using specialist vocabulary where appropriate.
- The marks for questions are shown in brackets.
- A *Data Sheet* is provided on pages 3 and 4. You may wish to detach this perforated sheet at the start of the examination.
- You are expected to use a calculator where appropriate.
- Questions 1(a) and 5(b) should be answered in continuous prose. In these questions you will be marked on your ability to use good English, to organise information clearly and to use specialist vocabulary where appropriate.

F	or Exam	iner's Us	е
Question	Mark	Question	Mark
1			
2			
თ			
4			
5			
Total (Co	lumn 1)	-	
Total (Co	Total (Column 2)		
Quality of Written Communication			
TOTAL	TOTAL		
Examiner's Initials			

Data Sheet

- A perforated *Data Sheet* is provided as pages 3 and 4 of this question paper.
- This sheet may be useful for answering some of the questions in the examination.
- You may wish to detach this sheet before you begin work.

ı	Fundamental constants and values					
	Quantity	Symbol	Value	Units		
ı	speed of light in vacuo	c	3.00×10^{8}	m s ⁻¹		
ı	permeability of free space	μ_0	$4\pi \times 10^{-7}$	H m ⁻¹		
ı	permittivity of free space	ϵ_0	8.85×10^{-12}	F m ⁻¹		
ı	charge of electron	e	1.60×10^{-19}	С		
ı	the Planck constant	h	6.63×10^{-34}	Js		
ı	gravitational constant	G	6.67×10^{-11}	N m ² kg ⁻²		
ı	the Avogadro constant	$N_{\rm A}$	6.02×10^{23}	mol ⁻¹		
ı	molar gas constant	R	8.31	J K ⁻¹ mol		
ı	the Boltzmann constant	k	1.38×10^{-23}	J K ⁻¹		
ı	the Stefan constant	σ	5.67×10^{-8}	W m ⁻² K		
ı	the Wien constant	α	2.90×10^{-3}	m K		
ı	electron rest mass	$m_{\rm e}$	9.11×10^{-31}	kg		
ı	(equivalent to 5.5×10^{-4} u)					
ı	electron charge/mass ratio	e/m _e	1.76×10^{11}	C kg ⁻¹		
ı	proton rest mass	$m_{\rm p}$	1.67×10^{-27}	kg		
ı	(equivalent to 1.00728u)	_	_	_		
ı	proton charge/mass ratio	e/m _p	9.58×10^{7}	C kg ⁻¹		
ı	neutron rest mass	$m_{\rm n}$	1.67×10^{-27}	kg		
ı	(equivalent to 1.00867u)					
ı	gravitational field strength	g	9.81	N kg ⁻¹		
ı	acceleration due to gravity	g	9.81	m s ²		
ı	atomic mass unit	u	1.661×10^{-27}	kg		
	(1u is equivalent to					
1	931.3 MeV)					

Fundamental particles

Class Name		Symbol	Rest energy	
			/MeV	
photon	photon	γ	0	
lepton	neutrino	$ u_e$	0	
		$ u_{\mu}$	0	
	electron	$\begin{array}{c} \nu_{\mu} \\ e^{\pm} \end{array}$	0.510999	
	muon	μ^{\pm}	105.659	
mesons	pion	π^{\pm}	139.576	
		π^0	134.972	
	kaon	\mathbf{K}^{\pm}	493.821	
		\mathbf{K}^0	497.762	
baryons	proton	p	938.257	
	neutron	n	939.551	

Properties of quarks

Туре	Charge	Baryon number	Strangeness
u	$+\frac{2}{3}$	$+\frac{1}{3}$	0
d	$-\frac{1}{3}$	$+\frac{1}{3}$	0
S	$-\frac{1}{3}$	$+\frac{1}{3}$	-1

Geometrical equations

arc length = $r\theta$ circumference of circle = $2\pi r$ area of circle = πr^2 area of cylinder = $2\pi rh$ volume of cylinder = $\pi r^2 h$ area of sphere = $4\pi r^2$ volume of sphere = $\frac{4}{3}\pi r^3$

Mechanics and Applied Physics

$$v = u + at$$

$$s = \left(\frac{u+v}{2}\right)t$$

$$s = ut + \frac{at^2}{2}$$

$$v^2 = u^2 + 2as$$

$$F = \frac{\Delta(mv)}{\Delta t}$$

$$P = Fv$$

$$efficiency = \frac{power\ output}{power\ input}$$

$$\omega = \frac{v}{r} = 2\pi f$$

$$a=\frac{v^2}{r}=r\omega^2$$

$$E_{r} = \frac{1}{2} I \omega^{2}$$

$$\omega_2 = \omega_1 + \alpha t$$

$$\omega_2^2 = \omega_1^2 + 2\alpha\theta$$

$$\theta = \frac{1}{2} (\omega_1 + \omega_2) t$$

$$T = I\alpha$$

angular momentum =
$$I\omega$$

 $W = T\theta$
 $P = T\omega$

angular impulse = change of angular momentum = Tt $\Delta Q = \Delta U + \Delta W$ $\Delta W = p\Delta V$ pV^{γ} = constant

work done per cycle = area of loop

input power = calorific value × fuel flow rate

indicated power as (area of p - V loop) × (no. of cycles/s) × (no. of cylinders)

friction power = indicated power - brake power

$$efficiency = \frac{W}{Q_{in}} = \frac{Q_{in} - Q_{out}}{Q_{in}}$$

maximum possible

efficiency =
$$\frac{T_{\rm H} - T_{\rm C}}{T_{\rm H}}$$

Fields, Waves, Quantum Phenomena

$$g = \frac{F}{m}$$

$$g = -\frac{GM}{r^2}$$

$$g = -\frac{\Delta V}{\Delta x}$$

$$V = -\frac{GM}{r}$$

$$a = -(2\pi f)^2 x$$

$$v = \pm 2\pi f \sqrt{A^2 - x^2}$$

$$x = A \cos 2\pi f t$$

$$T = 2\pi \sqrt{\frac{I}{g}}$$

$$\lambda = \frac{\omega s}{D}$$

$$d \sin \theta = n\lambda$$

$$\theta \approx \frac{\lambda}{D}$$

$$1^{n_2} = \frac{\sin \theta_1}{\sin \theta_2} = \frac{c_1}{c_2}$$

$$1^{n_2} = \frac{n_2}{n_1}$$

$$\sin \theta_c = \frac{1}{n}$$

$$E = hf$$

$$hf = \phi + E_k$$

$$hf = E_1 - E_2$$

$$\lambda = \frac{h}{p} = \frac{h}{mv}$$

$$c = \frac{1}{\sqrt{\mu_0 \varepsilon_0}}$$

Electricity

$$\epsilon = \frac{E}{Q}$$

$$\epsilon = I(R+r)$$

$$\frac{1}{R_{\rm T}} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \cdots$$

$$R_{\rm T} = R_1 + R_2 + R_3 + \cdots$$

$$P = I^2 R$$

$$E = \frac{F}{Q} = \frac{V}{d}$$

$$E = \frac{1}{4\pi\epsilon_0} \frac{Q}{r^2}$$

F = BII F = BQv $Q = Q_0 e^{-t/RC}$ $\Phi = BA$

 $E = \frac{1}{2} QV$

Turn over ▶

magnitude of induced emf = $N \frac{\Delta \Phi}{\Delta t}$

$$I_{\rm rms} = \frac{I_0}{\sqrt{2}}$$

$$V_{\rm rms} = \frac{V_0}{\sqrt{2}}$$

Mechanical and Thermal Properties

the Young modulus =
$$\frac{tensile\ stress}{tensile\ strain} = \frac{F}{A} \frac{l}{e}$$

energy stored = $\frac{1}{2}$ Fe

$$\Delta Q = mc \ \Delta \theta$$

$$\Delta Q = ml$$

$$pV = \frac{1}{3} Nm\overline{c^2}$$

$$\frac{1}{2}m\overline{c^2} = \frac{3}{2}kT = \frac{3RT}{2N_A}$$

Nuclear Physics and Turning Points in Physics

$$force = \frac{eV_p}{d}$$

$$force = Bev$$

radius of curvature =
$$\frac{mv}{Re}$$

$$\frac{eV}{d} = mg$$

 $work\ done = eV$

$$F = 6\pi \eta r v$$

$$I = k \frac{I_0}{x^2}$$

$$\frac{\Delta N}{\Delta t} = -\lambda N$$

$$\lambda = \frac{h}{\sqrt{2meV}}$$

$$N = N_0 e^{-\lambda t}$$

$$T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$$

$$R = r_0 A^{\frac{1}{3}}$$

$$E = mc^2 = \frac{m_0 c^2}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

$$l = l_0 \left(1 - \frac{v^2}{c^2} \right)^{\frac{1}{2}}$$

$$t = \frac{t_0}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$$

Astrophysics and Medical Physics

Body Mass/kg Mean radius/m

Sun 2.00×10^{30} 7.00×10^{8} Earth 6.00×10^{24} 6.40×10^{6}

1 astronomical unit = 1.50×10^{11} m

1 parsec = $206265 \text{ AU} = 3.08 \times 10^{16} \text{ m} = 3.26 \text{ ly}$

1 light year = 9.45×10^{15} m

Hubble constant $(H) = 65 \text{ km s}^{-1} \text{ Mpc}^{-1}$

 $M = \frac{\text{angle subtended by image at eye}}{\text{angle subtended by object at}}$

$$M = \frac{f_0}{f_c}$$

$$m - M = 5 \log \frac{d}{10}$$

 $\lambda_{\text{max}}T = \text{constant} = 0.0029 \text{ m K}$

v = Hd

 $P = \sigma A T^4$

$$\frac{\Delta f}{f} = \frac{v}{c}$$

$$\frac{\Delta \lambda}{\lambda} = -\frac{\nu}{c}$$

$$R_{\rm s} \approx \frac{2GM}{c^2}$$

Medical Physics

$$power = \frac{1}{f}$$

$$\frac{1}{u} + \frac{1}{v} = \frac{1}{f}$$
 and $m = \frac{v}{u}$

intensity level = $10 \log \frac{I}{I_0}$

 $I = I_0 e^{-\mu}$

$$\mu_{\rm m} = \frac{\mu}{\alpha}$$

Electronics

Resistors

Preferred values for resistors (E24) Series: 1.0 1.1 1.2 1.3 1.5 1.6 1.8 2.0 2.2 2.4 2.7 3.0 3.3 3.6 3.9 4.3 4.7 5.1 5.6 6.2 6.8 7.5 8.2 9.1 ohms and multiples that are ten times greater

$$Z = \frac{V_{\rm rms}}{I_{\rm rms}}$$

$$\frac{1}{C_{\rm T}} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \cdots$$

$$C_{\mathrm{T}} = C_1 + C_2 + C_3 + \cdots$$

$$X_{\rm C} = \frac{1}{2\pi fC}$$

Alternating Currents

$$f = \frac{1}{T}$$

Operational amplifier

$$G = \frac{V_{\text{out}}}{V_{\text{in}}}$$
 voltage gain

$$G = -\frac{R_{\rm f}}{R_{\rm 1}}$$
 inverting

$$G = 1 + \frac{R_{\rm f}}{R_{\rm 1}}$$
 non-inverting

$$V_{\text{out}} = -R_{\text{f}} \left(\frac{V_1}{R_1} + \frac{V_2}{R_2} + \frac{V_3}{R_3} \right)$$
 summing


Turn over for the first question

SECTION A: NUCLEAR INSTABILITY

Answer all of this question.

1 (a) X and Y are two different β emitting sources. Initially they contain the same number of unstable nuclei. Both sources have their emissions recorded over a period of time. The *decay constant* of source X is greater than that of Y. State what is meant by decay constant and describe **two** differences in the recordings from the two sources.

(b) The activity of a sample of radioactive iodine, $\frac{131}{53}$ I, is presented in the following graph.

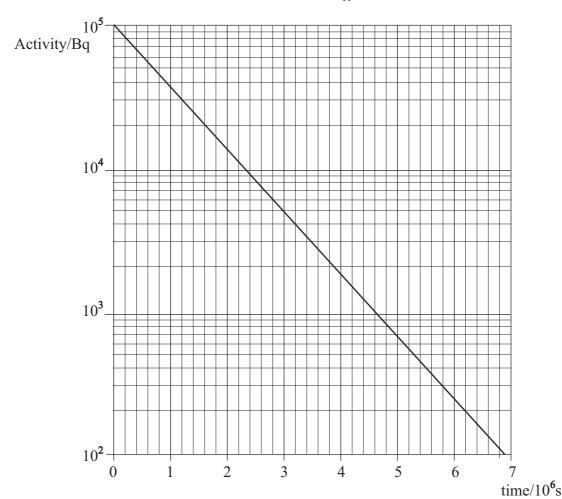

10

(i)	Show that the decay constant of $^{131}_{53}I$ is about 1×10^{-6} s ⁻¹ .
(ii)	Calculate the half-life of ¹³¹ ₅₃ I in days.
(iii)	Calculate the initial number of $^{131}_{53}$ I atoms in the sample.
	(7 marks)

Turn over for the next question

Turn over ▶

There are no questions printed on this page

SECTION B: APPLIED PHYSICS

Answer all questions.

2	gene	rate el	s are burned in a power plant to produce steam that drives turbine generators to ectricity. Fast-growing trees are specially grown for this purpose. The power n efficiency of 24%.
	(a)		ulate the energy input to the power plant to give a daily electrical energy output of $\times 10^{11}$ J.
			(1 mark)
	(b)		calorific value of the wood chips is 10.4 MJ kg ⁻¹ . Calculate the daily mass of d chips required.
			(1 mark)
	(c)	The 1	maximum temperature of the steam is 420 °C and the minimum temperature is C.
		(i)	Calculate the maximum theoretical efficiency of a heat engine operating between these temperatures.
		(ii)	State one reason why in practice the power plant has a lower efficiency than your answer to part (c)(i).
		(iii)	State one advantage of wood grown for fuel instead of oil or coal to produce steam for the power plant, even though the wood-fuelled power plant may be less efficient.
			(4 marks)


3 A swing bridge carries road traffic over a river. To allow movement of river boats, the bridge opens by turning through an angle of 90° in a time of 80 seconds. **Figure 1** shows plan views of the bridge in closed and open positions.

River River River River Road Road

Bridge closed to river traffic

Bridge open to river traffic

The graph below shows the variation of angular speed of the bridge from fully closed to fully open. The bridge accelerates, moves at constant angular speed and then decelerates to a standstill.

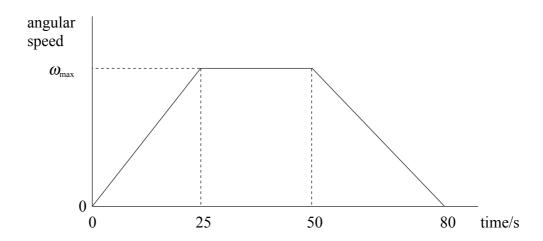

(a)	(i)	Show that the maximum angular speed, ω_{max} , of the bridge is 0.030rad s^{-1} .
	(ii)	Calculate the angular acceleration of the bridge in the first 25 s.
		(3 marks)
(b)	Whe	moment of inertia of the bridge about its axis of rotation is $9.1 \times 10^8 \mathrm{kg}\mathrm{m}^2$. In the bridge is moving, a constant frictional torque of $3.5 \times 10^5 \mathrm{N}\mathrm{m}$ acts to oppose notion.
	Calc	ulate
	(i)	the torque that must be applied by the driving motor of the bridge to give the bridge the angular acceleration calculated in part (a)(ii),
	(ii)	the power output of the driving motor to keep the bridge moving at constant angular speed between 25 s and 50 s,
	(iii)	the maximum kinetic energy of the bridge.
		(4 marks)

4 Figure 2 shows a friction clutch which enables an electric motor to be easily connected to and disconnected from a flywheel. When the motor needs to be connected to the flywheel the discs are forced into contact and slipping occurs for a short time until the motor and flywheel rotate at a common angular speed. The clutch is then said to be engaged.

Figure 2

Lining of high friction material

Flywheel

Bearings

Clutch discs

Driveshaft

(a)	The flywheel is initially stationary and the motor is rotating at 1500 rev min ⁻¹ . The rotating parts (the rotor and clutch disc) of the electric motor have a moment of inertia of 0.56 kg m ² . Calculate the angular momentum of the motor.
	(2 marks)
(b)	The motor is now connected by means of the clutch to the flywheel. The moment of inertia of the flywheel and driveshaft is $0.94\mathrm{kg}\mathrm{m}^2$.
	(i) Explain why the speed of the motor falls as the clutch engages.

(ii)	Calculate the common angular speed of the motor and flywheel immed the clutch is engaged.	iately after
(iii)	Calculate the angular impulse on the flywheel as the clutch engages.	
		(5 marks)

Turn over for the next question

- 5 (a) The *p-V* diagram in **Figure 3** shows the theoretical cycle for a petrol engine in which a fixed mass of air is taken through the following four processes:
 - $A \rightarrow B$ adiabatic compression from an initial temperature of 293 K
 - $B \rightarrow C$ addition of 700 J of energy at constant volume
 - $C \rightarrow D$ adiabatic expansion
 - $D \rightarrow A$ reduction in pressure at constant volume.

Figure 3

p/10⁶ Pa

4.0

3.0

2.0

1.0

B

1.0

D

D

A


A

V/10⁻³ m³

(1)	of the air in process $B \rightarrow C$.
<i>(</i> ;;)	
(ii)	Show that 0.021 mol of air are taken through the cycle.

(iii)	Determine the work output of the cycle.
	(6 marks)

(b) **Figure 4** shows the p-V diagram taken from a real four-stroke petrol engine having the same maximum and minimum volumes as the cycle shown in **Figure 3**.

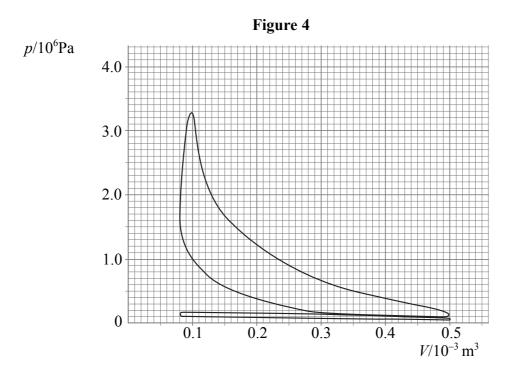

Explain **two** differences between the theoretical and real cycles (as illustrated by **Figures 3** and **4**).

ou may be awarded additional marks to those shown in brackets for the quality of ritten communication in your answer.
(2 marks)

Quality of Written Communication (2 marks)

There are no questions printed on this page